




TECHNICAL DATA SHEET

FRP POLE 30 ft. / 1650 lbf / CTC

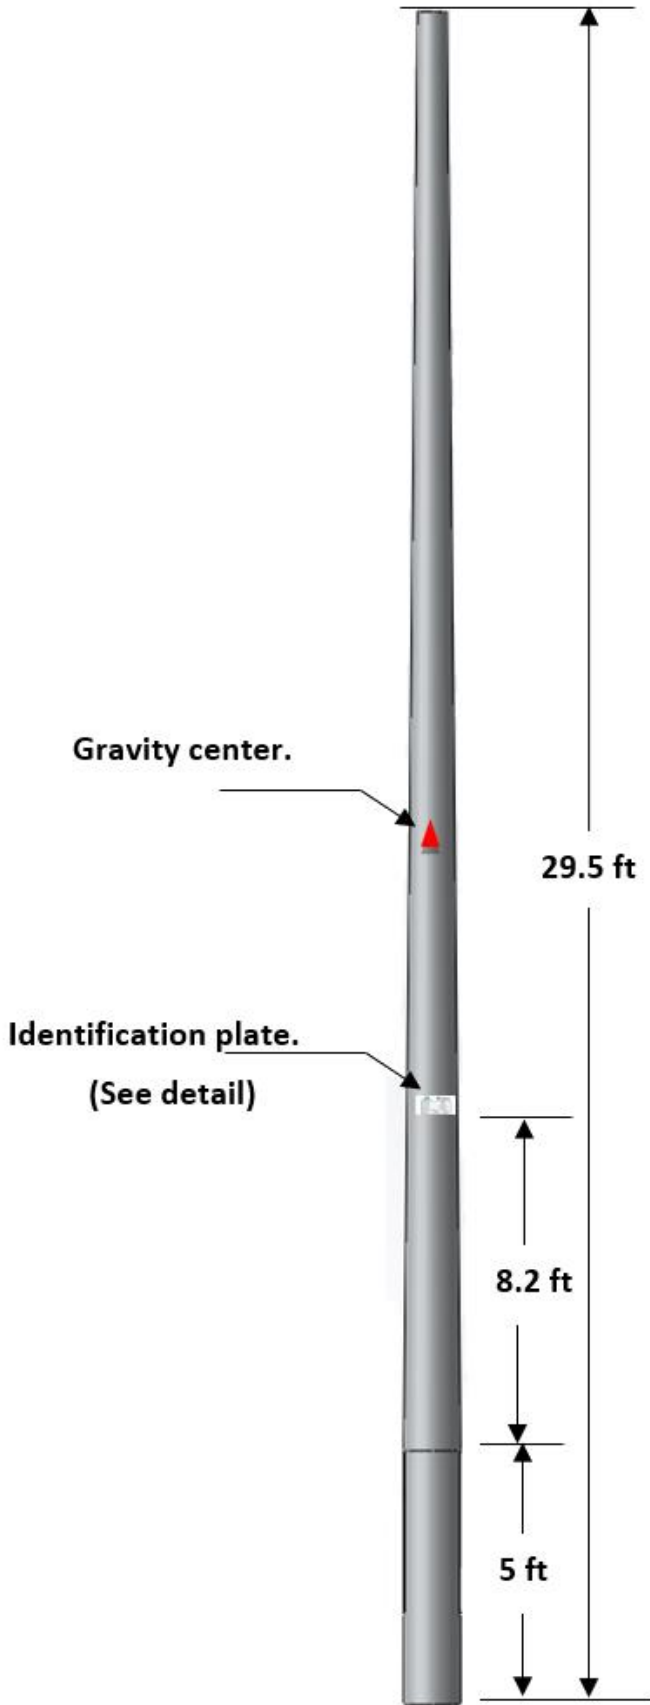

FEATURES	
Approximate weight (lb)	187.0
Comercial Height (ft)	30
NESC Grade B equivalency	Class 4
Nominal work load (lbf)	660
Design load (lbf)	1650
Safety Factor	2.5
Pole Height (ft)	29.5
Embedment Height (ft)	5
Base nominal diameter (in)	12.4
Embedment diameter (in)	11.5
Top nominal diameter (in)	5.9
Taper	1.8%
Manufacturing standard	ASTM D 4923-01

FIBERGLASS REINFORCED POLYMER

 Multicreto®	
Licensed by  Fibratore	
Pais de Origen: México	
Nomenclatura: PCRFV-7M-CTC	
Carga de Diseño: 350 Kgf	
No. De serie: Muestra	Masa Total: 38 Kg
Tipo de Fibra: E	Fecha: 2016

4 " 2 "

IDENTIFICATION PLATES:

1. Marking embedded in the laminate
2. Translucent finish
3. Not removable

NOTES:

1. Gray finish with UV protection and self-extinguishing agent
2. Perforations according to customer's requirement.
3. Smooth exterior finish.

