



**TECHNICAL DATA SHEET**  
FRP POLE 40 ft. / 1650 lbf / CTC

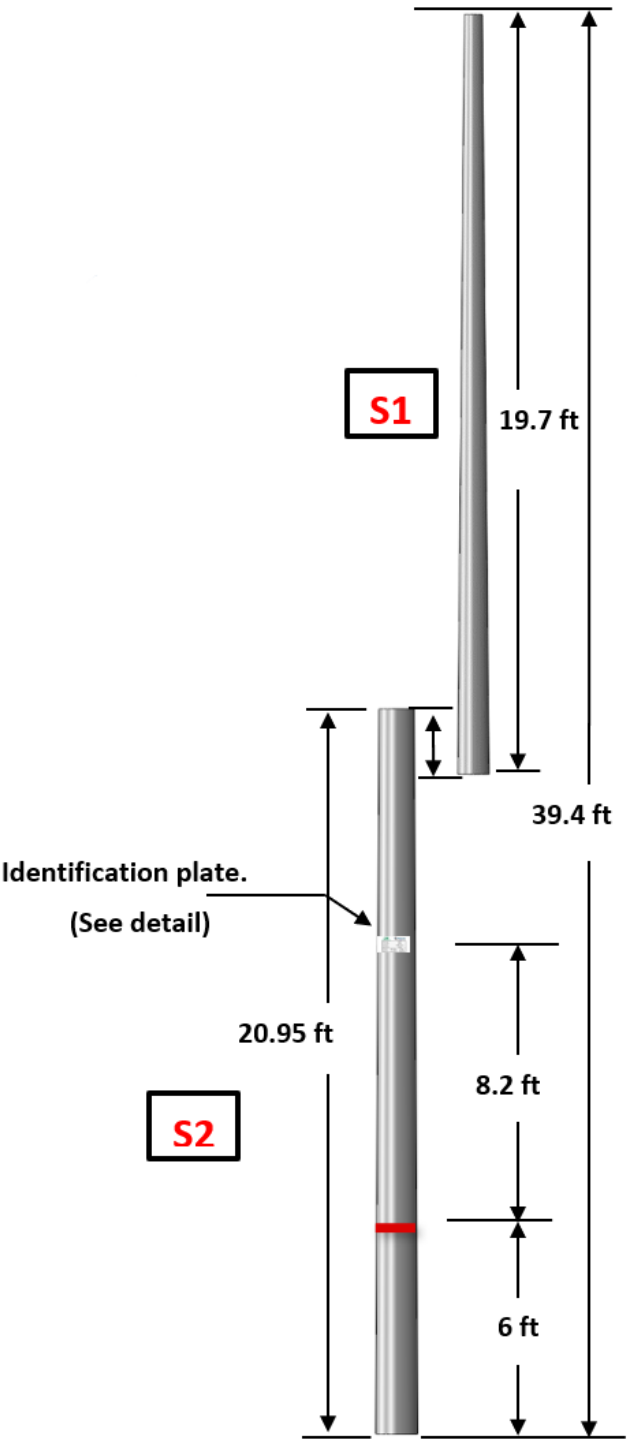

FEATURES				
Approximate weight (lb)	297.0			
Comercial Height (ft)	40			
NESC Grade B equivalency	Class 4			
Nominal work load (lbf)	660			
Design load (lbf)	1650			
Safety Factor	2.5			
Pole Height (ft)	39.4			
Embedment Height (ft)	6			
Base nominal diameter (in)	14.6			
Embedment diameter (in)	13.5			
Top nominal diameter (in)	5.9			
Taper	1.8%			
Manufacturing standard	ASTM D 4923-01			
Section	Base interior diameter	Top interior diameter	(%) Taper	Approximate weight by section
S1	9.76"	5.6"	1.8%	121 lb
S2	13.46"	8.94"	1.8%	176 lb

**FIBERGLASS REINFORCED POLYMER**

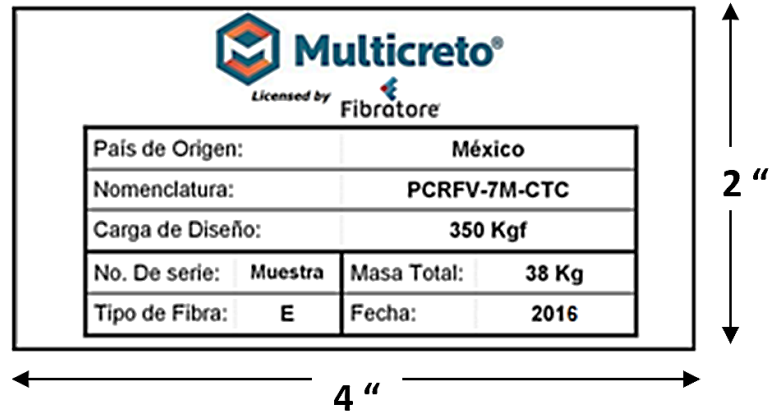

**Multicreto®**  
Licensed by **Fibratore**

País de Origen:		México	
Nomenclatura:		PCRFV-7M-CTC	
Carga de Diseño:		350 Kgf	
No. De serie:	Muestra	Masa Total:	38 Kg
Tipo de Fibra:	E	Fecha:	2016

4" x 2"

**NOTES:**

1. Gray finish with UV protection and self-extinguishing agent
2. Perforations according to customer's requirement.
3. Smooth exterior finish.

**IDENTIFICATION PLATES:**

1. Marking embedded in the laminate
2. Translucent finish
3. Not removable

