



## TECHNICAL DATA SHEET

FRP POLE 40 ft. / 2393.6 lbf / CTC

| FEATURES                   |                |
|----------------------------|----------------|
| Approximate weight (lb)    | 369.6          |
| Comercial Height (ft)      | 40             |
| NESC Grade B equivalency   | Class 2        |
| Nominal work load (lbf)    | 957.4          |
| Design load (lbf)          | 2393.6         |
| Safety Factor              | 2.5            |
| Pole Height (ft)           | 39.4           |
| Embedment Height (ft)      | 6              |
| Base nominal diameter (in) | 15.3           |
| Embedment diameter (in)    | 14.05          |
| Top nominal diameter (in)  | 5.9            |
| Taper                      | 1.8%           |
| Manufacturing standard     | ASTM D 4923-01 |

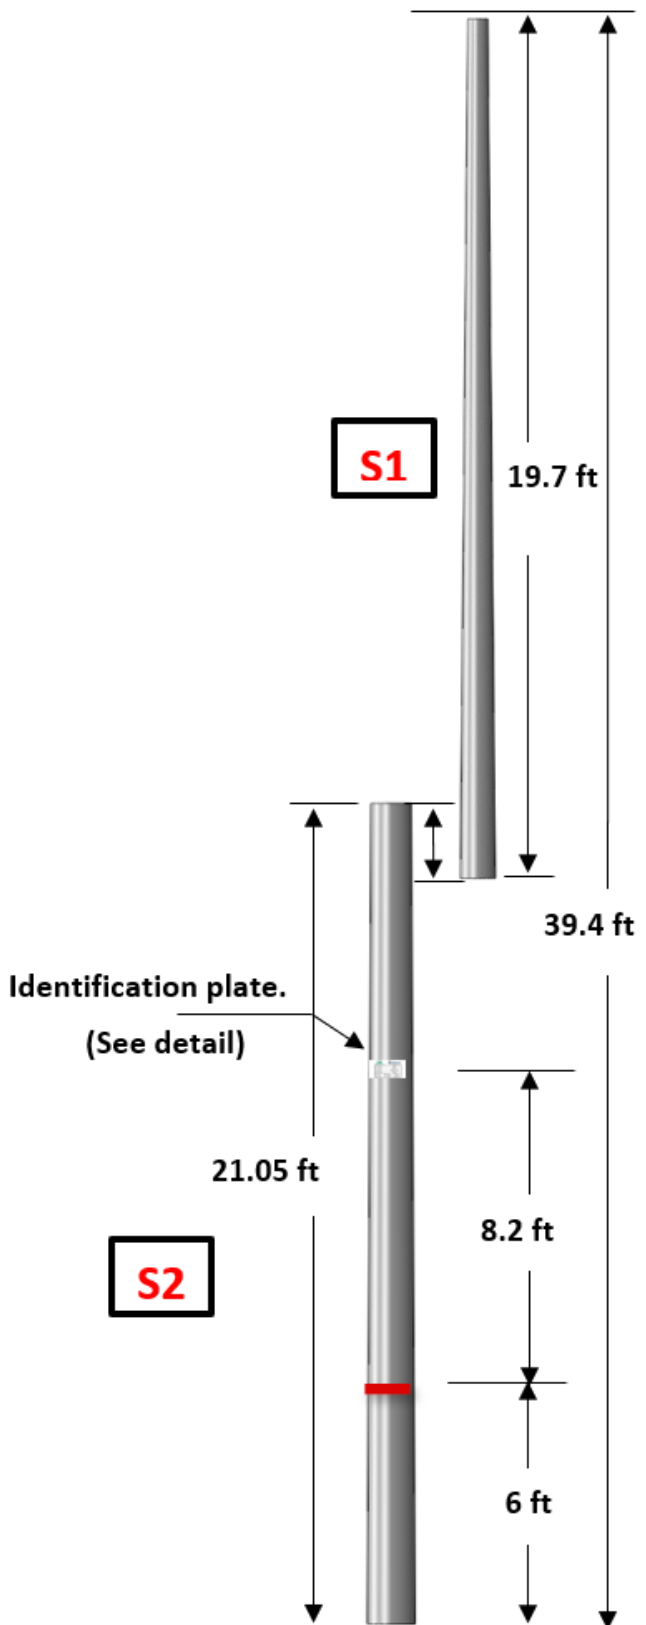

### FIBERGLASS REINFORCED POLYMER

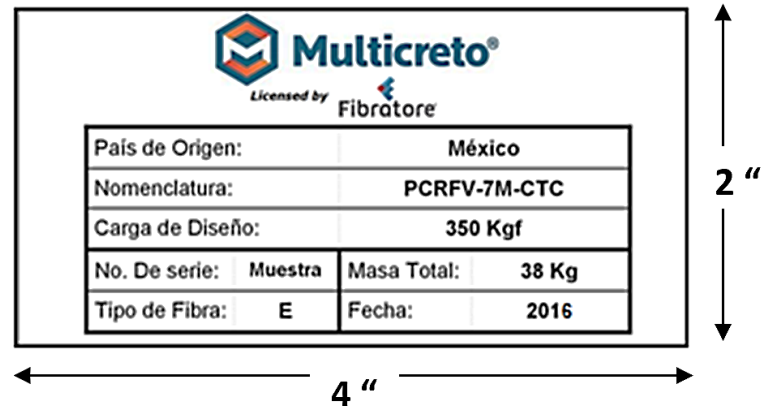

The identification plate is 4 inches wide and 2 inches high. It features the Multicreto logo and is licensed by Fibratore. The technical specifications are as follows:

|                  |         |              |       |
|------------------|---------|--------------|-------|
| Pais de Origen:  |         | México       |       |
| Nomenclatura:    |         | PCRFV-7M-CTC |       |
| Carga de Diseño: |         | 350 Kgf      |       |
| No. De serie:    | Muestra | Masa Total:  | 38 Kg |
| Tipo de Fibra:   | E       | Fecha:       | 2016  |

#### IDENTIFICATION PLATES:

1. Marking embedded in the laminate
2. Translucent finish
3. Not removable

#### NOTES:

1. Gray finish with UV protection and self-extinguishing agent
2. Perforations according to customer's requirement.
3. Smooth exterior finish.